




▶ PERFORMANCE PLUS: SPIRAL BEVEL SERIES

GAM Performance Plus Miniature Spiral Bevel Gearboxes

The VP Series Performance Plus Miniature Bevel Gearboxes pack high performance in a small package with the highest torque density, range of ratios, and torque capacity on the market.

- Highest torque density for the size
- Sizes 27, 33, and 45 mm
- More ratios for the size: 1:1 to 4:1
- High Efficiency 98%
- Nominal Torque capacity of 1.3 to 16 Nm
- Hollow shaft output option (33 & 45 mm)
- High Strength aluminum housing
- Sealed and lubricated for life with synthetic oil
- VPC Series with integrated motor mount

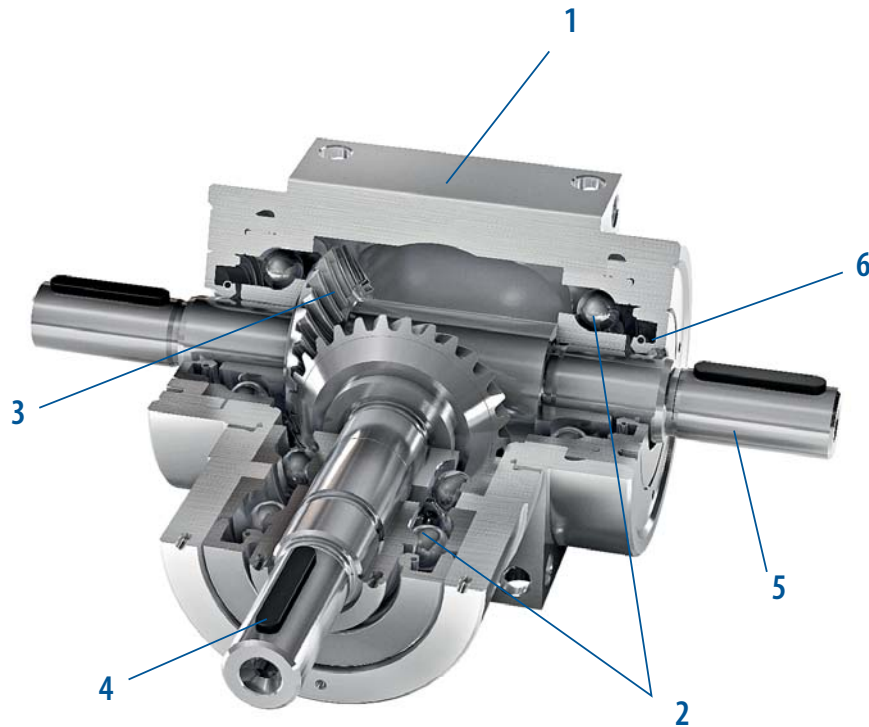

1. Housing

Lightweight, high-strength aluminum - all 6 sides can be used for mounting

2. Bearings

Deep groove ball bearings handle axial and radial loading

3. Spiral Bevel Gearing

Case-hardened

4. Input

Available with shaft input or integrated motor adapter and coupling to easily mount to any IEC, NEMA, or servo motor

5. Output

Solid shaft with key or hollow shaft with shrink disc


6. Seals

Protected with high quality NBR seals and lubricated for life with synthetic oil

VP Series with Shaft Input




Available Models

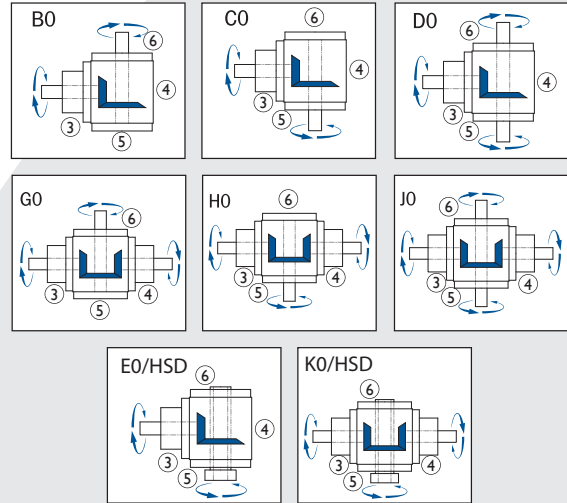

VPC Series with Integrated Motor Mount Input



Available Models

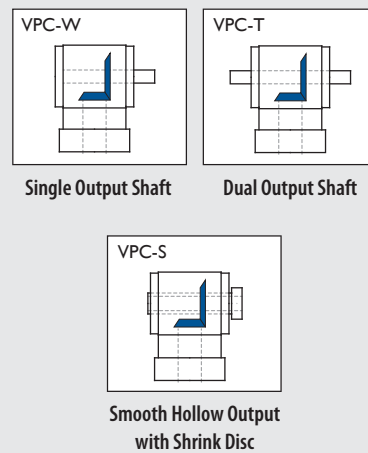




▶ VP & VPC SERIES

VP & VPC Series		027		033		045	
Ratios Available		1, 1.5, 2, 3, 4:1					
Ratio	Input Speed (RPM)	Output Torque (Nm)	Power (kW)	Output Torque (Nm)	Power (kW)	Output Torque (Nm)	Power (kW)
1:1	50	3.5	0.019	5	0.027	16	0.085
	100	3.5	0.037	4.9	0.052	15.9	0.170
	200	3.3	0.071	4.8	0.103	15.1	0.323
	500	3	0.160	4.6	0.246	14.6	0.780
	750	3	0.240	4.2	0.337	13.6	1.09
	1000	2.9	0.310	4.1	0.438	13.2	1.41
	1500	2.9	0.465	4	0.641	12.8	2.05
	2000	2.8	0.598	3.9	0.833	12.4	2.65
	2500	2.7	0.721	3.8	1.02	12	3.21
	3000	2.6	0.833	3.7	1.19	11.8	3.78
	4000	2.5	1.07	3.6	1.54	11.2	4.79
1.5:1	50	Contact GAM	Contact GAM	Contact GAM	Contact GAM	Contact GAM	Contact GAM
	100						
	200						
	500						
	750						
	1000						
	1500						
	2000						
	2500						
	3000						
	4000						
2:1	50	-	-	Contact GAM	Contact GAM	Contact GAM	Contact GAM
	100	-	-				
	200	-	-				
	500	-	-				
	750	-	-				
	1000	-	-				
	1500	-	-				
	2000	-	-				
	2500	-	-				
	3000	-	-				
	4000	-	-				
3:1	50	-	-	Contact GAM	Contact GAM	Contact GAM	Contact GAM
	100	-	-				
	200	-	-				
	500	-	-				
	750	-	-				
	1000	-	-				
	1500	-	-				
	2000	-	-				
	2500	-	-				
	3000	-	-				
	4000	-	-				
4:1	50	-	-	Contact GAM	Contact GAM	Contact GAM	Contact GAM
	100	-	-				
	200	-	-				
	500	-	-				
	750	-	-				
	1000	-	-				
	1500	-	-				
	2000	-	-				
	2500	-	-				
	3000	-	-				
	4000	-	-				


▶ VP & VPC SERIES

VP & VPC Series		027		033		045	
Stock Ratios		1, 1.5, 2, 3, 4					
Nominal Output Torque (T_{2n})	Nm (lb-in)	1:1	3.5 (31)	5 (44)	16 (142)		
		1.5:1	2.2 (19)	3.2 (28)	11 (97)		
		2:1	- -	2.3 (20)	8.5 (75)		
		3:1	- -	1.5 (13)	6.5 (58)		
		4:1	- -	1.3 (12)	5 (44)		
Max Acceleration Output Torque* (T_{2B})	Nm (lb-in)	1:1	5 (44)	7.5 (66)	25 (221)		
		1.5:1	3.3 (29)	4.8 (42)	16.5 (146)		
		2:1	- -	3.5 (31)	13 (115)		
		3:1	- -	2 (18)	10 (89)		
		4:1	- -	2 (18)	7.5 (66)		
Emergency Output Torque** (T_{2not})	Nm (lb-in)	1:1	7 (62)	10 (89)	32 (283)		
		1.5:1	4.4 (39)	6.4 (57)	22 (195)		
		2:1	- -	4.6 (41)	17 (150)		
		3:1	- -	3 (27)	13 (115)		
		4:1	- -	2.6 (23)	10 (89)		
Max Speed (n_{imax})	RPM	-	7500	7500	7500		
Output Backlash (j)	arcmin	-	≤15	≤15	≤15		
Allowable Radial Load (F_{rad})***	N (lbs)	Input	120 (27)	160 (36)	320 (72)		
		Output	150 (34)	200 (45)	400 (90)		
Allowable Axial Load (F_{axial})***	N (lbs)	Input	60 (13)	80 (18)	160 (36)		
		Output	75 (17)	100 (22)	200 (45)		
Weight (m)	kg (lbs)	VP	0.16 (0.35)	0.22 (0.49)	0.55 (1.2)		
		VPC	0.31 (0.68)	0.37 (0.82)	0.93 (2.1)		
Noise Level (L_{PA})	dB(A)	-	≤70	≤70	≤70		
Mass Moment of Inertia (J_1)	kg cm ² (lb-in ²)	1:1	Contact GAM	Contact GAM	Contact GAM		
		1.5:1	Contact GAM	Contact GAM	Contact GAM		
		2:1	Contact GAM	Contact GAM	Contact GAM		
		3:1	Contact GAM	Contact GAM	Contact GAM		
		4:1	Contact GAM	Contact GAM	Contact GAM		
Efficiency at Load		>98%					
Service Life		> 15,000 hours					
Lubrication		Synthetic Oil, ISO VG 150					
Protection Rating		IP 64					
Operating Temperature Range		≤80°C					


* At 1000 rpm maximum ** Permissible 1000 times maximum during service *** Load applied at center of output shaft @400 RPM

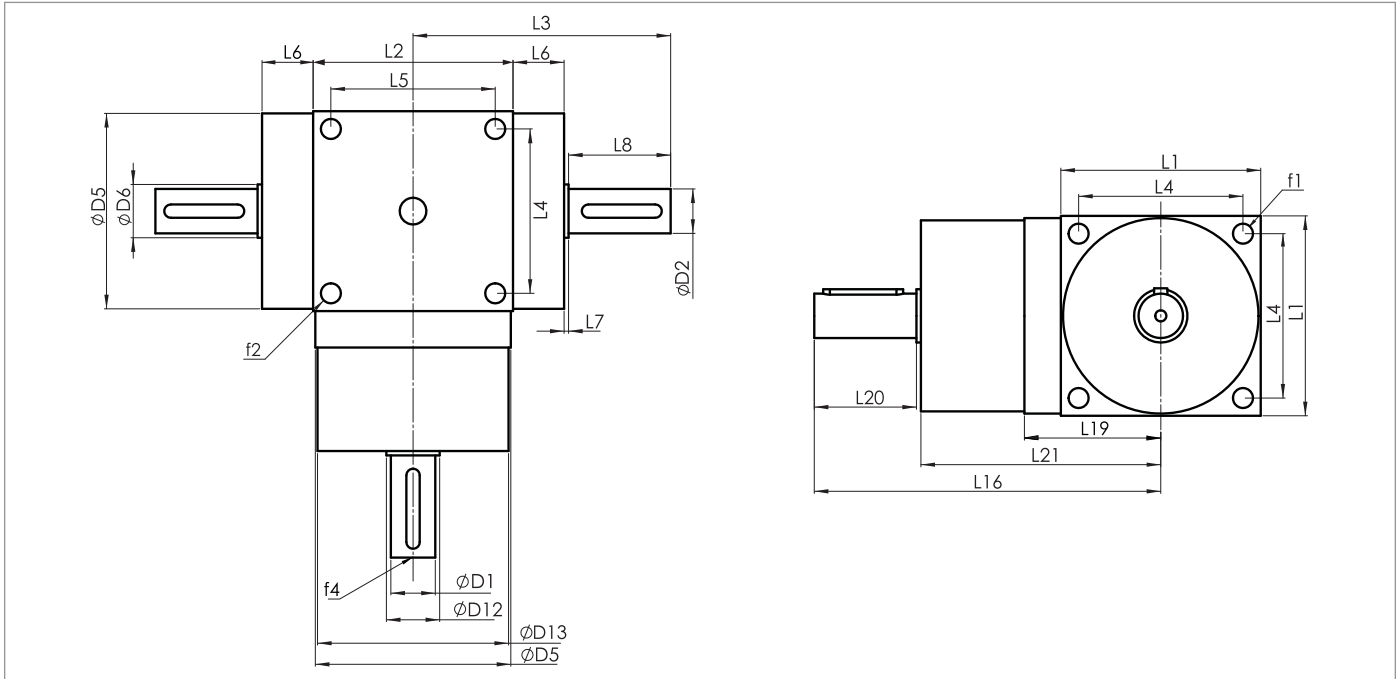

Dimension	Model Description	VP-Series B0, C0, D0, G0, H0, J0 configurations		
		027 mm	033 mm	045 mm
D1 k6	Input Shaft Diameter	6	7	10
D2 k6	Output Shaft Diameter	6	7	10
D5 h7	Pilot Diameter	26	32	44
D6	Output Step Diameter	8	10	12
D12	Input Step Diameter	8	10	12
D13	Input Hub Pilot Diameter	25	28	43
f1	Output Flange Thread	8xM3	8xM3	8xM4
f2	Housing Thread	16xM3	24xM3	24xM4
f3	Output Shaft Thread	M2	M3	M3
f4	Input Shaft Thread (DIN 332)	M2	M3	M3
L1	Housing Size	27	33	45
L2	Housing Size	37	33	45
L3	Output Shaft to Centerline	33.5	40	50
L4	Mounting Bolt Location	22	27	37
L5	Mounting Bolt Location	25	27	37
L6	Pilot Height	3	7.5	11.5
L7	Small Pilot Height	1	1	1
L8	Output Shaft Length	13	15	23
L16	Centerline to End of Input Shaft	51	58	78
L19	Centerline to Input Pilot	18	21	31
L20	Input Shaft Length	13	15	23
L21	Centerline to Input Hub	37	42	54

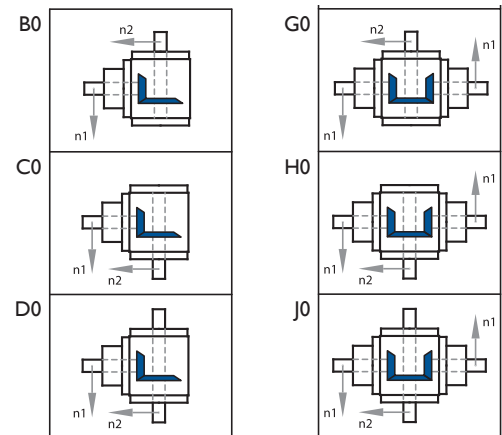


▶ VP SERIES

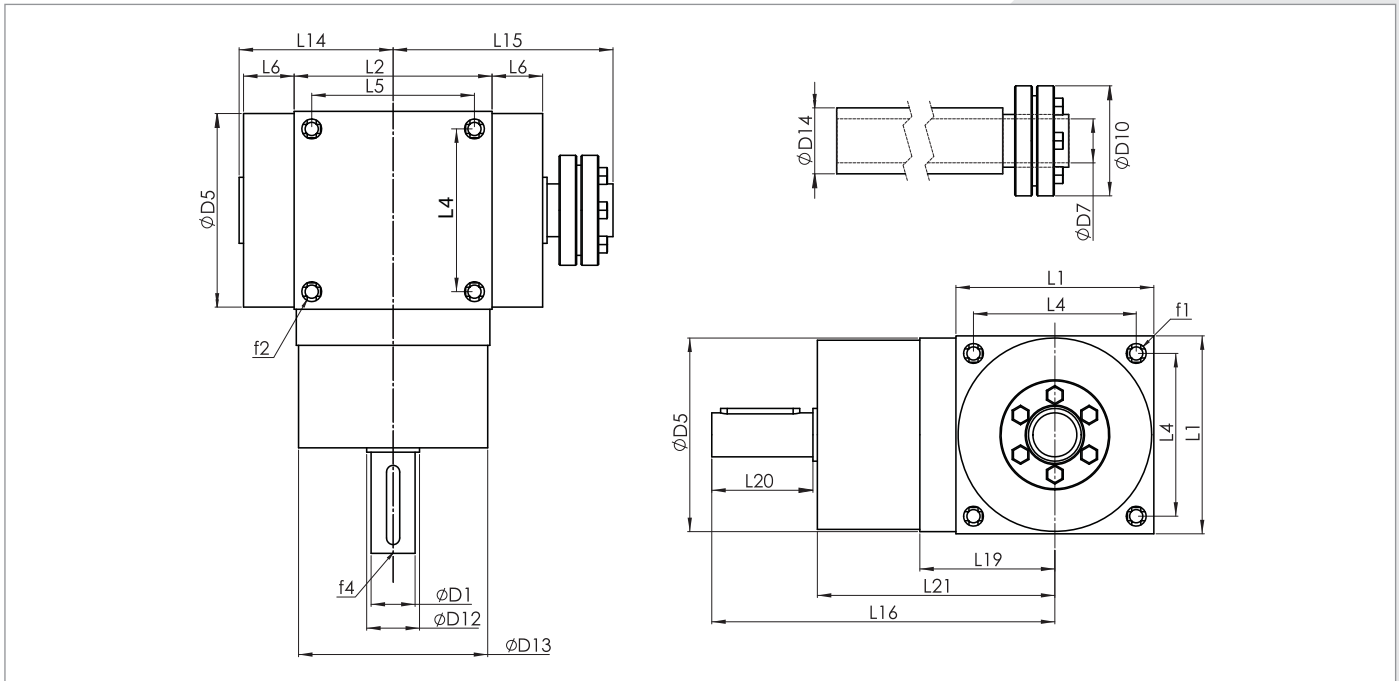


Dimension	Model Description	VP Series E0 and K0 Configuration*	
		033 mm	045 mm
D1 k6	Input Shaft Diameter	7	10
D5 h7	Pilot Diameter	32	44
D7 H7**	Hollow Shaft Diameter	6	10
D10	Shrink Disk OD	Consult GAM	Consult GAM
D12	Input Step Diameter	10	12
D13	Input Hub Pilot Diameter	28	43
D14 j6	Extended Shaft Diameter	8	12
f1	Output Flange Thread	8xM3	8xM4
f2	Housing Thread	24xM3	24xM4
f4	Input Shaft Thread (DIN 332)	M3	M3
L1	Housing Size	33	45
L2	Housing Size	33	45
L4	Mounting Bolt Location	27	37
L5	Mounting Bolt Location	27	37
L6	Pilot Height	7.5	11.5
L14	Hollow Shaft to Centerline	25	35
L15	Shrink Disk End to Centerline	35	50
L16	Centerline to End of Input Shaft	58	78
L20	Input Shaft Length	15	23
L21	Centerline to Input Hub	42	54

E0/HSD




K0/HSD



* Size 027 Not available with hollow output shaft


** Mating shaft should have j6 tolerance

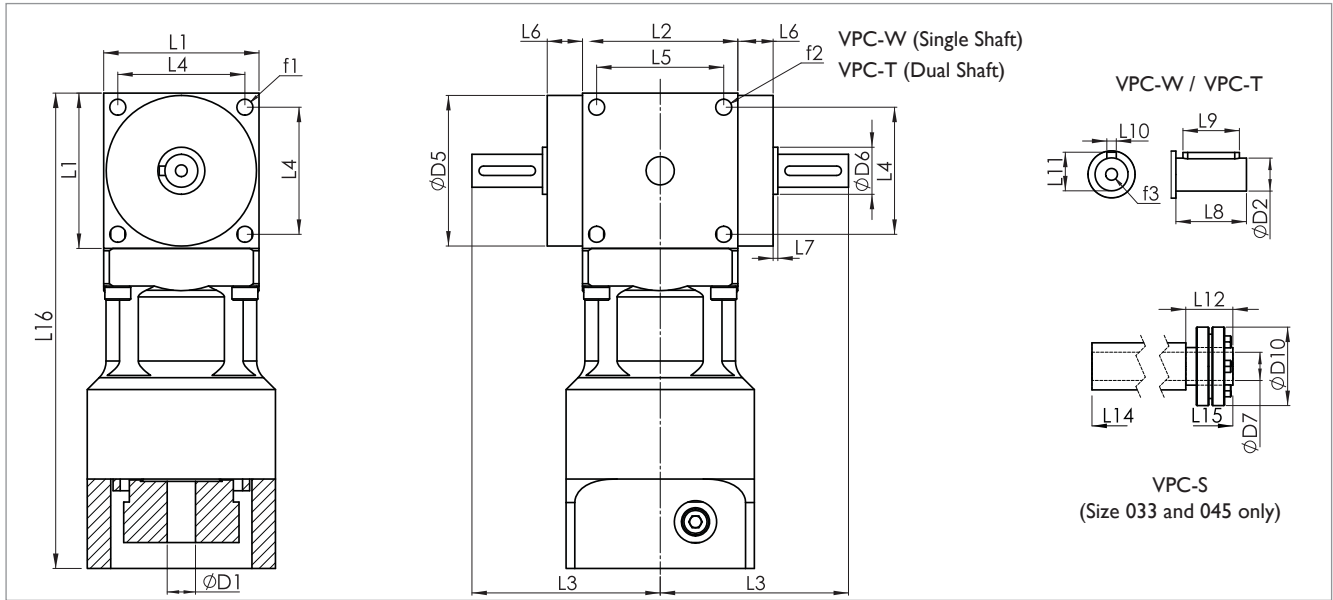

Dimension	Model Description	VPC-Series: VPC-T, VPC-W, VPC-S		
		027	035	045
		mm	mm	mm
D1 min	Motor Shaft Diameter	6	6	6
D1 max		14	14	24
D2 k6	Output Shaft Diameter	6	7	10
D5 h7	Pilot Diameter	26	32	44
D6	Shoulder Diameter	8	10	12
D7 H7*	Smooth Hollow Diameter	-	6	10
D10	Shrink Disc OD	-	Consult GAM	Consult GAM
L1	Housing Size	27	33	45
L2	Housing Size	37	33	45
L3	Output Shaft To Centerline	33.5	40	50
L4	Mounting Bolt Location	22	27	37
L5	Mounting Bolt Location	25	27	37
L6	Output Pilot Height	3	7.5	11.5
L7	Small Pilot Height	1	1	1
L8	Output Shaft Length	13	15	23
L9	Key Length	10	12	18
L10	Key Width	2	2	3
L11	Shaft Height With Key	4	5	6
L12	Shaft Length	-	10	15
L14	Hollow Shaft To Centerline	-	25	35
L15	Shrink Disc End To Centerline	-	35	50
L16**	Overall Length	93	101	133
f1	Output Flange Mounting Holes	8xM3	8xM3	8xM4
f2	Housing Mounting Holes	16xM3	24xM3	24xM4
f3	Shaft Thread Din 332	M2	M3	M3



* Mating shaft should have j6 tolerance **Depending on motor, length may change

▶ VP & VPC SERIES

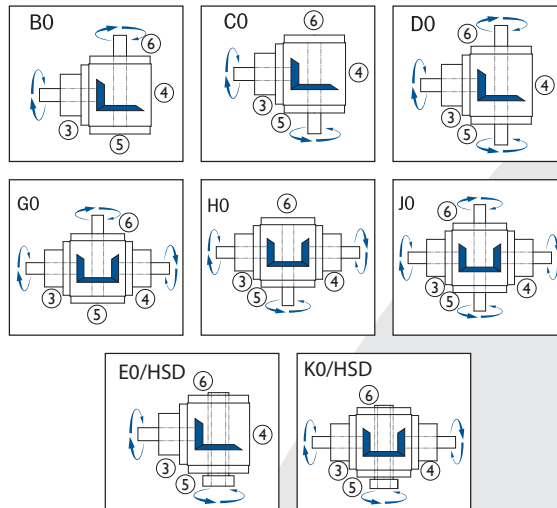

TYPE CODES FOR VP SERIES

Example: VP - C0 - 033 - 001 - 750 - S1 - M0000 - H0000 - C0000

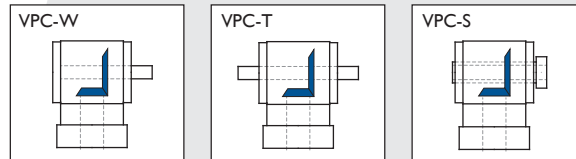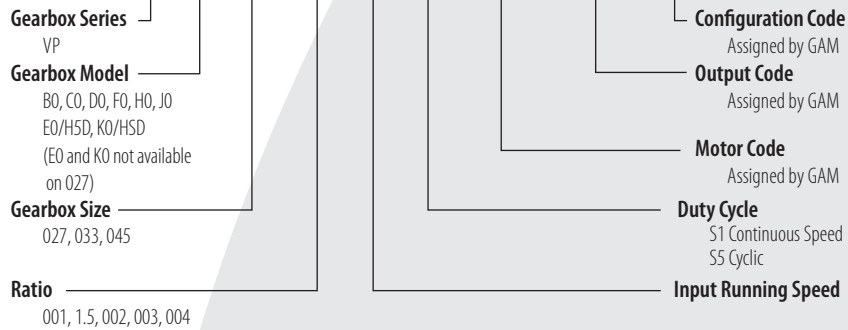

VPC-W Single Output Shaft **VPC-T** Dual Output Shaft **VPC-S** Smooth Hollow Output with Shrink Disc

TYPE CODES FOR VPC SERIES

Example: VPC - W - 090 - 002 G - 750 - S1 - M0000 - H0000 - C0000

