


Determination of the Duty Cycle (ED)

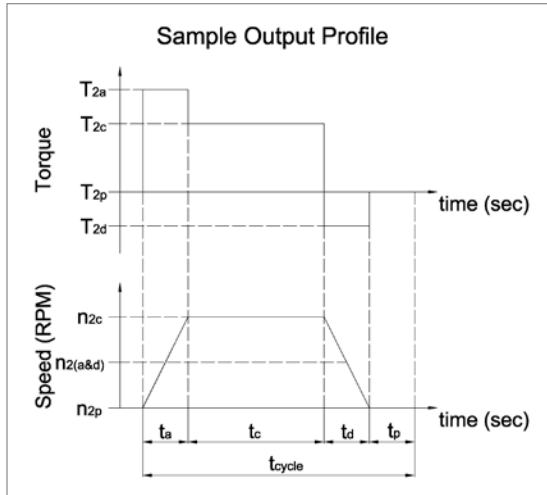

$$ED = \frac{t_a + t_c + t_d}{t_{\text{cycle}}}$$

If $ED < 60\%$ and $(t_a + t_c + t_d) < 20$ minutes, perform a cycle operation selection (S5)

If $ED > 60\%$ or $(t_a + t_c + t_d) > 20$ minutes, perform a continuous operation selection (S1)

Index	
1	Input
2	Output
a	Acceleration
B	Maximum Acceleration
c	Constant
d	Deceleration
m	Mean
max	Maximum
n	Nominal
p	Pause

Symbol	Unit	Description
ED	%	Duty Cycle
fs	-	Shock Factor
i	-	Ratio
J	kg-cm ²	Moment of Inertia
n	RPM	Speed
t	s	Time
T	Nm	Torque
Zh	-	Number of Cycles
η	%	Efficiency

Selection of Optimum Gearbox for a Continuous Operation (S1)

Data needed before selection can be performed:

1. Output profile
2. Desired ratio (i)

Calculations to be performed:

1. Mean Output Speed

$$\Rightarrow n_{2m} = \frac{n_{2a}t_a + n_{2c}t_c + n_{2d}t_d}{t_a + t_c + t_d} = \text{_____}$$

2. Root - Mean Output Torque

$$\Rightarrow T_{2m} = \sqrt[3]{\frac{n_{2a}t_a T_{2a}^3 + n_{2c}t_c T_{2c}^3 + n_{2d}t_d T_{2d}^3}{n_{2a}t_a + n_{2c}t_c + n_{2d}t_d}} = \text{_____}$$

Selection Criteria for Gearbox:

1. Mean Output Speed must not exceed the nominal speed rating of the gearbox.

$$n_{2m} \cdot i \leq n_{1n}$$

2. Mean Output Torque must not exceed the nominal torque rating of the gearbox.

$$T_{2m} \leq T_{2n}$$


See technical data tables for values of n_{1n} and T_{2n}

Selection of Optimum Gearbox for a Cycle Operation (S5)

Data needed before selection can be performed:

1. Maximum Torque of the motor (T_{IB})
2. Output profile
3. Desired ratio (i)
4. Inertia of the load (J_L)*
5. Inertia of the motor (J_{motor})*

*optional

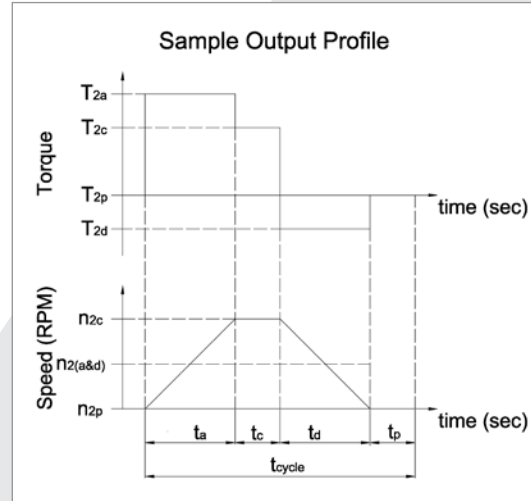

Calculation to be performed:

1. Shock Factor (f_s)

$$Z_h = \frac{3600}{t_{cycle}}$$

$Z_h < 1000$	$\Rightarrow f_s = 1.0$
$1000 < Z_h < 1500$	$\Rightarrow f_s = 1.1$
$1500 < Z_h < 2000$	$\Rightarrow f_s = 1.3$
$2000 < Z_h < 3000$	$\Rightarrow f_s = 1.6$
$3000 < Z_h <$	$\Rightarrow f_s = 2.0$

2. Maximum Output Torque $T_{2max} = T_{IB} \cdot i \cdot f_s \cdot \eta =$ _____

Selection Criteria for Gearbox:

1. Maximum Output Speed must not exceed the maximum speed rating of the gearbox.

$$n_{2c} \cdot i \leq n_{1max}$$

2. Maximum Output Torque must not exceed the maximum torque rating of the gearbox.

$$T_{2max} \leq T_{2B}$$

3. (optional) Match inertia of the motor to the inertia of the load.

$$J_{motor} \approx J_1 + \frac{J_L}{i^2}$$

See technical data tables for values of η , n_{1max} , T_{2B} , and J_1